



# Loop-O9400S SDH/SONET ADM/TM

## Features:

- 1U height, full front access (ETSI) unit
  - 1US1 shelf STM-1(OC-3)
  - 1US4 shelf STM-1/4(OC-3/12)
- Rack mount, wall mount, and stand-alone
- Aggregate Lines
  - STM-1(OC-3) software configurable
  - STM-1/4 (OC-3/12) software configurable
  - Two hot-swappable aggregate lines
- On-board tributaries on TG1 slot
  - Up to 16 E1(120 ohm)/T1
  - Up to 16 E1(75 ohm)
- Fixed tributary modules on TG2 and TG3 slots
  - Up to two 16 E1(120 ohm)/T1 tributary modules
  - Up to two 16E1 (75 ohm) tributary modules
  - Up to six E3/T3 tributary modules (for 1US4 only)
  - Up to one 1 GbE and 3 FE EoS module with L2 switch (for 1US4 only)
  - Up to two 1 GbE or 4 FE (manufacture option) EoS module without L2 switch
- Power Modules
  - Two hot-swappable DC plug-in modules (-36 to -75 Vdc)
  - Single AC plug-in module (90 to 240 Vac)
  - AC and DC (coexistent) fixed module (90 to 240 Vac / -36 to -75Vdc)
- Two RS232 Asynchronous
- Networking Protection
  - SNCP protection
  - MSP (1+1) protection for TM
- TM, ADM, cross-connect
- VC11/VC12/VC3/VC4 cross-connect
- External/Internal/Line timing with SSM
- Supports VCAT, LAPS, GFP, LCAS, and non-LCAS
- Performance monitoring
- Alarm suppression, masking, and reporting
- Ethernet Order Wire (EOW) using VoIP technology
- Management:
  - Console Port, VT-100 menu-driven; SNMP Port
  - Centralized management with Loop's EMS/iNMS over DCC channel
  - LoopView GUI EMS (Element Management System)
  - Loop iNMS\* with full FCAPS and end-to-end circuit management
  - Telnet support
  - SSH
- RoHS compliant

\*Future option



## Description

The Loop-O9400S ADM/TM is a compact, economic STM1/4 (OC-3/12) ADM & TM multiplexer designed to add and drop up to <sup>note 1</sup>:

1US1 shelf STM-1(OC-3)  
- 48 E1/T1 tributaries  
- 2 GbE tributaries  
- 8 FE tributaries

1US4 shelf STM-1/4(OC-3/12)  
- 48 E1/T1 tributaries  
- 6 E3/T3 tributaries  
- 2 GbE tributaries  
- 8 FE tributaries

With up to two aggregate STM-1/4 (OC-3/12) interfaces, the Loop-O9400S can offer the service provider a versatile protection scheme including SNCP and MSP (1+1) protection for both ring and linear network topology.

All interfaces are fully compliant with the relevant ETSI standards and ITU recommendations. The Loop-O9400S provides powerful OAM&P (Operation, Administration, Maintenance and Provisioning) functionality, including fault management, performance monitoring, configuration management, and network security management. Through the console port, LAN port, Inband E1 and DCC channel, the OAM&P can be achieved both locally and remotely via SNMP or menu-driven interfaces.

### Powerful SDH Loop's EMS/NMS

The Loop-O9400S provides a complete set of operation interfaces that are consistent with the Telecommunication Management Network (TMN) concept (ITU Recommendation M.30, G.784) for SDH/SONET Network Element/Operations System (NE/OS), NE/NE, and NE/Craft communications. Users can easily operate the Loop-O9400S both locally or remotely for centralized management.

Note 1: Detail on Tributary Type and Capacity Reference Table shown in the following page.

## Ordering Information

To specify options, choose from list below:

**Note:** All O9400S units, plug-in modules and accessories are RoHS compliant.

**Note:** If a different environment requirement is needed, please contact Loop's Marketing & Sales team regarding availability.

Model	Description	Note
<b>Main Unit</b>		
Loop-O9400-S-1US4-agg1-agg2-tg1-tg2-tg3-pp1-pp2-G	1U height shelf with STM-1/4(OC-3/12) engine	
Loop-O9400-S-1US1-agg1-agg2-tg1-tg2-tg3-pp1-pp2-G	1U height shelf with STM-1(OC-3) engine	
<b>Plug-in Card</b>		
Loop-O9400-S-SFPC-G	SFP (mini-GBIC) housing plug-in card without SFP module	Order one or two cards

### Accessories

<b>User's Manual</b>		
Loop-O9400-S-UM-1US4	Optional, paper copy of User Manual. A CD version of the manual is already included as standard package.	
Loop-O9400-S-UM-1US1	Optional, paper copy of User Manual. A CD version of the manual is already included as standard package.	
<b>Power Cord</b>		
Loop-ACC-PC-USA	AC power cord for Taiwan/America	U
Loop-ACC-PC-EU	AC power cord for Europe	..
Loop-ACC-PC-UK	AC power cord for UK	-L-
Loop-ACC-PC-AUS	AC power cord for Australia	↑
Loop-ACC-PC-CH	AC power cord for China	↑
<b>Order wire phone</b>		
Loop-O9400-S-OW-G	Order Wire (VoIP) Phone	
<b>SIP Proxy Server</b>		
Loop-O9400-S-SIP	SIP Proxy Server Basic Software	Customer must provide a MAC address so that a license key can be generated to operate the software at that address.
<b>Conversion Panels</b>		
Loop-ACC-P-1SCSI-16RJ-G	One SCSI to sixteen RJ (1u height) without cable	
Loop-ACC-P-1SCSI-16WW-G	One SCSI to sixteen Wire Wrap (1u height) without cable	
Loop-ACC-P-1SCSI-16BNC-G	One SCSI to sixteen BNC (1.5u height) without cable	
<b>Conversion Cable</b>		
Loop-ACC-CAB-SCSI68M-200-1SCSI68M-G	SCSI68/Male to one SCSI68/Male; Length 200 cm	Used for all Conversion Panels
<b>Ear Mounts</b>		
19"/23' ear mounts	A pair of 19"/23" ear mounts is supplied as part of standard package. <b>Note:</b> For other sizes, please contact your nearest Loop sales representative.	

■ where **agg1** and **agg2** are used to select aggregation line type:

<b>SFPC</b>	SFP (mini-GBIC) housing plug-in card without SFP module	Order SFP modules separately from SFP module plug-in table below.
-------------	---	---

**SFP Optical/Electrical Module Plug-in Tables**

<b>SFP 155 Mbps (mini GBIC) Dual Fiber</b>	MHBTW	Multi-mode optical module with dual uni-directional fiber, 155Mbps, 1310nm, 2Km, LC connector w/o DDM, Fast Ethernet and compliant with ITU G.957	Use 2 fibers for all SFP optical modules
	PHB3W	Single-mode optical module with dual uni-directional fiber, 155Mbps 1310nm, 30Km, LC connector w/o DDM, S-1.1/IR1/Fast Ethernet	
	PHB5W	Single-mode optical module with dual uni-directional fiber, 155Mbps, 1310nm, 50Km, LC connector w/o DDM, L-1.1/LR1/Fast Ethernet	
	PHC8W	Single-mode optical module with dual uni-directional fiber, 155Mbps, 1550nm, 80Km, LC connector w/o DDM, L-1.2/LR2	
	PHCUW	Single-mode optical module with dual uni-directional fiber, 155Mbps, 1550nm, 100Km, LC connector w/o DDM, L-1.2/LR2Fast Ethernet	
	PHCXW	Single-mode optical module with dual uni-directional fiber, 155Mbps, 1550nm, 120Km, LC connector w/o DDM, L-1.2 extended distance	
	PHB3D	Single-mode optical module with dual uni-directional fiber, 155Mbps, 1310nm, 30Km, LC connector with DDM, S-1.1/IR1/Fast Ethernet	
	PHB5D	Single-mode optical module with dual uni-directional fiber, 155Mbps, 1310nm, 50Km, LC connector with DDM, L-1.1/LR1/Fast Ethernet	
	PHC8D	Single-mode optical module with dual uni-directional fiber, 155Mbps, 1550nm, 80Km, LC connector with DDM, L-1.2/LR2	
	PHCUD	Single-mode optical module with dual uni-directional fiber, 155Mbps, 1550nm, 100Km, LC connector with DDM, L-1.2/LR2/Fast Ethernet	
	PHCXD	Single-mode optical module with dual uni-directional fiber, 155Mbps, 1550nm, 120Km, LC connector with DDM, L-1.2 extended distance	
<b>155 Mbps Bi-directional Single Fiber</b>	PHD2W	Single-mode optical module with single bi-directional fiber, 155 Mbps, Tx 1310 nm/Rx 1550 nm, 10~20Km, LC connector w/o DDM, Fast Ethernet and compliant with ITU G.957	<ul style="list-style-type: none"> <li>▪ 1310nm from master to slave</li> <li>▪ Order PHD2W to use with PHE2W</li> <li>▪ Use 1 fiber</li> </ul>
	PHE2W	Single-mode optical module with single bi-directional fiber, 155Mbps, Tx 1550 nm/Rx 1310 nm, 10~20Km, LC connector w/o DDM, Fast Ethernet and compliant with ITU G.957	<ul style="list-style-type: none"> <li>▪ 1550nm from slave to master</li> <li>▪ Order PHE2W to use with PHD2W</li> <li>▪ Use 1 fiber</li> </ul>
	PHD6W	Single-mode optical module with single bi-direction fiber, 155Mbps, Tx 1310 nm/Rx 1550nm, 60Km, LC connector w/o DDM, Extend distance L4.2	<ul style="list-style-type: none"> <li>▪ 1310nm from master to slave</li> <li>▪ Order PHD6W to use PHE6W</li> <li>▪ Use 1 fiber</li> </ul>
	PHE6W	Single-mode optical module with single bi-directional fiber, 155Mbps, Tx 1550 nm/Rx 1310 nm, 60Km, LC connector w/o DDM, Extend distance L4.2	<ul style="list-style-type: none"> <li>▪ 1550nm from slave to master</li> <li>▪ Order PHE6W to use with PHD6W</li> <li>▪ Use 1 fiber</li> </ul>
<b>155 Mbps Electrical transceiver</b>	EHNAC	Electrical transceiver module, 155Mbps, 100m, mini-BNC coaxial connector	
<b>622M~1.25G mini GBIC Dual Fiber</b>	PKB1W	Single-mode optical module with dual uni-directional fiber, 622M~1.25G, 1310nm, 10Km, LC connector w/o DDM, S-4.1/IR1/1000Base-LX	Use 2 fibers for all SFP optical modules

<b>155~622Mbps mini GBIC Dual Fiber</b>	PJB2W	Single-mode optical module with dual uni-directional fiber, 155~622Mbps, 1310nm, 15~20Km, LC connector w/o DDM, 1000 Base-LX	
	PJB5W	Single-mode optical module with dual uni-directional fiber, 155~622Mbps, 1310nm, 50Km, LC connector w/o DDM, L-4.1/LR1	
	PJC8W	Single-mode optical module with dual uni-directional fiber, 155~622Mbps, 1550nm, 80Km, LC connector w/o DDM, S-4.2/LR2	
	PJB2D	Single-mode optical module with dual uni-directional fiber, 155~622Mbps, 1310nm, 15~20Km, LC connector with DDM, S-4.1/IR1	
	PJB4D	Single-mode optical module with dual uni-directional fiber, 155~622Mbps, 1310nm, 40Km, LC connector with DDM, L-4.1/LR1	
	PJB5D	Single-mode optical module with dual uni-directional fiber, 155~622Mbps, 1310nm, 50Km, LC connector with DDM, L-4.1/LR1	
	PJC8D	Single-mode optical module with dual uni-directional fiber, 155~622Mbps, 1550nm, 80Km, LC connector with DDM, L-4.2/LR2	
	PJCXW	Single-mode optical module with dual uni-directional fiber, 155~622Mbps, 1550nm, 120Km, LC connector w/o DDM, L-4.2 extended distance	
	PJCXD	Single-mode optical module with dual uni-directional fiber, 155~622Mbps, 1550nm, 120Km, LC connector with DDM, L-4.2 extended distance	

**NOTE:** For other special optical modules, please contact your nearest Loop sales representative.

■ where **tg1** is manufacture option used to select T1/E1 type for the Tributary Group1 (TG1) slot (must select one)

<b>tg1=</b>	<b>Description</b>	<b>Note</b>
<b>8TE</b>	8 T1/E1(120 ohm) on board	
<b>8E75</b>	8 E1(75 ohm) on board	
<b>16TE</b>	16 T1/E1(120 ohm) on board	
<b>16E75</b>	16 E1(75 ohm) on board	

■ where **tg2** is manufacture option used to select a daughter card for the Tributary Group2 (TG2) slot:

<b>tg2=</b>	<b>Description</b>	<b>Note</b>
<b>16TE</b>	16 T1/E1(120 ohm) daughter card	
<b>16E75</b>	16 E1(75 ohm) daughter card	
<b>3TE3</b>	3 E3/T3 daughter card	1US4 version only
<b>1GE4NSW</b>	1 GbE over 155/622 Mbps SDH/SONET signal daughter card without L2 switch.	
<b>4FE4NSW</b>	4 FE over 155/622 Mbps SDH/SONET signal daughter card without L2 switch.	

■ where **tg3** is manufacture option used to select a daughter card for the Tributary Group3 (TG3) slot:

<b>tg3=</b>	<b>Description</b>	<b>Note</b>
<b>16TE</b>	16 T1/E1(120 ohm) daughter card	
<b>16E75</b>	16 E1(75 ohm) daughter card	
<b>4EoS6SW</b>	1 GbE and 3FE into L2 switch with 1 GbE link mapped to 155/622 Mbps SDH/SONET signal daughter card	Available for 1US4 version only. Must use SD48 power if you are selecting a <b>1GE4NSW</b> or a <b>4FE4NSW</b> daughter card as a <b>tg2</b> option and a <b>4EoS6SW</b> or a <b>4EoS1SW</b> daughter card as a <b>tg3</b> option.
<b>4EoS1SW</b>	1 GbE and 3FE into L2 switch with 4/8 100 Mbps links mapped to 155/622 Mbps SDH/SONET signal daughter card	
<b>1GE4NSW</b>	1 GbE over 155/622 Mbps SDH/SONET signal daughter card without L2 switch	
<b>4FE4NSW</b>	4 FE over 155/622 Mbps SDH/SONET signal daughter card without L2 switch	
<b>3TE3</b>	3 E3/T3 daughter card	1US4 version only

■ where **pp1** is used to select 1st power supply:

<b>pp1 =</b>	<b>Description</b>	<b>Note</b>
<b>AD</b>	AC and DC (co-existent) fixed, power module (90 to 240 Vac / -36 to -75Vdc)	-AD is a fixed power supply. If you order AD then you cannot select any items for pp2 -For AC power module choose an appropriate power cord -Order one power module only -Cannot be used if you selected a <b>1GE4NSW</b> or a <b>4FE4NSW</b> daughter card as a <b>tg2</b> option and a <b>4EoS6SW</b> or a <b>4EoS1SW</b> daughter card as a <b>tg3</b> option.
<b>SA</b>	Single AC plug-in power module (90 to 240 Vac, 50/60Hz)	-For AC choose an appropriate power cord -Order one power module only -Cannot be used if you selected a <b>1GE4NSW</b> or a <b>4FE4NSW</b> daughter card as a <b>tg2</b> option and a <b>4EoS6SW</b> or a <b>4EoS1SW</b> daughter card as a <b>tg3</b> option.
<b>SD48</b>	Single, hot-swappable DC plug-in power module -48 Vdc (-36 to -75Vdc)	-Can order up to two power modules for Redundancy

■ where **pp2** is used to select 2nd power supply:

<b>pp2 =</b>	<b>Description</b>	<b>Note</b>
<b>SD48</b>	Single, hot-swappable DC plug-in power module -48 Vdc (-36 to -75Vdc)	-Can order up to two power modules for redundancy

#### **Comparison of Slots between 1US1 and 1US4**

	<b>1US1</b>	<b>1US4</b>
Tg1	8TE/8E75/16TE/16E75	the same with 1US1
Tg2	Does not support 3TE3	All
Tg3	Does not support 3TE3, 4EoS6SW, and 4EoS1SW	All

## **Loop-O9400S STM-1/4 PRODUCT SPECIFICATIONS**

### **SFP Module Characteristics**

#### **Aggregate Lines and STM-1/4 (OC-3/12) tributary Modules Characteristics**

<b>SFP Optical Module</b>	<b>Direction</b>	<b>Data Rate</b>	<b>Wavelength(nm)</b>	<b>Connector</b>	<b>Distance</b>
MHBTW	Dual uni-directional fiber	155M	1310nm	LC without DDM	2 Km
PHB3W	Dual uni-directional fiber	155M	1310nm	LC without DDM	30 Km
PHB5W	Dual uni-directional fiber	155M	1310nm	LC without DDM	50 Km
PHC8W	Dual uni-directional fiber	155M	1550nm	LC without DDM	80 Km
PHCUW	Dual uni-directional fiber	155M	1550nm	LC without DDM	100 Km
PHCXW	Dual uni-directional fiber	155M	1550nm	LC without DDM	120 Km
PHB3D	Dual uni-directional fiber	155M	1310nm	LC with DDM	30 Km
PHB5D	Dual uni-directional fiber	155M	1310nm	LC with DDM	50 Km
PHC8D	Dual uni-directional fiber	155M	1550nm	LC with DDM	80 Km
PHCUD	Dual uni-directional fiber	155M	1550nm	LC with DDM	100 Km
PHCXD	Dual uni-directional fiber	155M	1550nm	LC with DDM	120 Km
PHD2W	Single bi-directional fiber	155M	Tx 1310 nm/Rx 1550 nm	LC without DDM	10~20 Km
PHE2W	Single bi-directional fiber	155M	Tx 1550 nm/Rx 1310nm	LC without DDM	10~20 Km
PHD6W	Single bi-directional fiber	155M	Tx 1310 nm/Rx 1550nm	LC without DDM	60 Km
PHE6W	Single bi-directional fiber	155M	Tx 1550 nm/Rx 1310 nm	LC without DDM	60 Km

<b>SFP Electrical Module</b>	<b>Direction</b>	<b>Data Rate</b>	<b>Wavelength(nm)</b>	<b>Connector</b>	<b>Distance</b>
EHNAC	Dual uni-directional	155M	n.a.	Mini-BNC	100 m



### Fast Ethernet (FE) interface

Line Rate	10/100M bps	Mapping	n x VC12, n x VC11, n x VC3 or n x VC4
Layer2 Protocol	RSTP (802.1W), VLAN (802.1Q, 802.1P) Flow Control (802.3X) MSTP (802.1S) (future option) IGMP Snooping (future option) QoS	Connector	RJ45
Process Protocol	VCAT, GFP(G.7041), LAPS, LCAS(G.7042), and non-LCAS		

### Gigabit Ethernet (GbE) interface

Line Rate	10/100/1000Mbps (1GE4NSW only supports 1000Mbps)	Mapping	n x VC12, n x VC11, n x VC3 or n x VC4
Layer2 Protocol	RSTP (802.1W), VLAN (802.1Q, 802.1P) Flow Control (802.3X) MSTP (802.1S) (future option) IGMP Snooping (future option) QoS	Connector	RJ45
Process Protocol	VCAT, GFP(G.7041), LAPS, LCAS(G.7042), and non-LCAS		

### System Clock

Clock Source	Internal clock 2 aggregate lines clocks (East STM-1/4 (OC-3/12), West STM-1/4 (OC-3/12)) 3 tributary clocks 1 external input and output clock (2.048 MHz of ITU-T G.703 or E1 for STM-1/4, T1 for OC-3/12)
--------------	---

### Management

LEDs	Multi-color LEDs
Console port	Electrical: RS232 Connector: DB9S (female, DCE) Protocol: Menu driven VT-100
Telnet	
SNMP	SNMPv1 (RFC1213)
Inband interface	Using 1 E1
Outband interface	Using DCC channel, user selectable 3, 9 or 12 channels

### Diagnostics

#### Mainboard

Loopback Test	Direction: to optical lines, to tributary lines
---------------	---

#### TE1 card

Loopback Test	Direction: to optical lines, to tributary lines
BERT Test	TE1 interface Direction: to optical lines, to tributary lines

### Performance Monitor

Performance Reports	Performance Parameters: Error Block (EB), Background Block Error (BBE), Error Second (ES), Burst Error Second (BES), Severe Error Second (SES), Unavailable Second (UAS)			
Alarm History	System Alarm	Alarm Cut Off, Power Loss, TS Sync Loss, SNCP Switch, MSP Switch, Login/Logout, FOM Equip/Unequip, SFP Tx Fail, SFP Rx Fail, SFP Temperature		
	SDH/SONET Line Alarm	SDH	Line	PI-LOS, RS-LOF, RS-TIM, RS-BIP UAS, MS-SD, MS-SF, MS-AIS, MS-RDI, MS-BIP UAS, MS-REI UAS,
			Ho-Path	AU-LOP, AU-AIS, HP-SD, HP-SF, HP-TIM, HP-UNEQ, HP-PLM, HP-RDI-S, HP-RDI-C, HP-RDI-P, HP-BIP UAS, HP-REI UAS, LOM
			Lo-Path	TU-LOP, TU-AIS, LP-SD, LP-SF,
		SONET	Line	LOS-PI, LOF-S, TIM-S, BIP-S UAS, SD-L, SF-L, AIS-L, RDI-L, BIP-L UAS, REI-L UAS
		STS-Path	LOP-P, AIS-P, SD-P, SF-P, TIM-P, UNEQ-P, PLM-P, RDI-S-P, RDI-C-P, RDI-P-P, BIP-P UAS, REI-P UAS, LOM	
		VT-Path	LOP-V, AIS-V, SD-V, SF-V	
Alarm Queue	Contains up to 200 alarm records of latest alarm types, alarm severity, date and time.			

### Power

AC module	100 to 240 Vac, 50/60Hz	
DC module	-48 Vdc (-36 to -75 Vdc)	
AC and DC coexistent module	100 to 240 Vac, 50/60Hz, -36 to -75 Vdc	
Power Consumption	Loop-O9400R-1US1	DC: Max 24.6 W
		AC: Max 25.7 W
		DC & AC: Max 27.5 W
	Loop-O9400R-1US4	DC: Max 39.6 W
	AC: Max 43.9 W	
	DC & AC: Max 47.1 W	

### Physical and Environmental

Dimensions for 1u	432 x 44 x 240 mm. (W x H x D)
Temperature	0 to 50°C
Humidity	0-95%RH (non-condensing)
Mounting	19 inch rack mountable, and wall mountable


### Standards Compliance

ITU	G.664, G.707, G.7041, G.7042, G.775, G.783, G.806, G.823, G.747, X.86
ANSI	T1.105, T1.107
IEEE	802.1q (VLAN), 802.1w (RSTP), 802.1s (MSTP), 802.1ad (stack VLAN), 802.3x (flow control), 802.1p (QoS)


### Certification

EMC	EN55024
EMI	EN55022 Class A, FCC Part 15 Class A, EN55024
Safety	EN60950-1, IEC60950-1

# Loop-O9400S 1U Front Panel

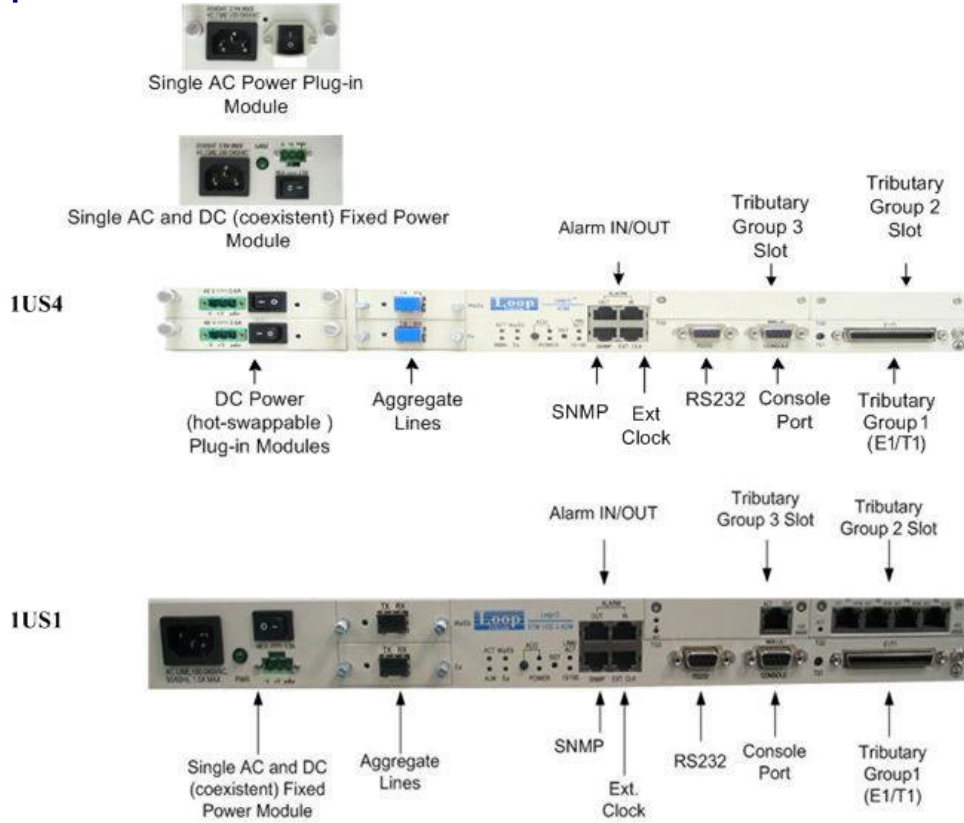

# Application Illustration

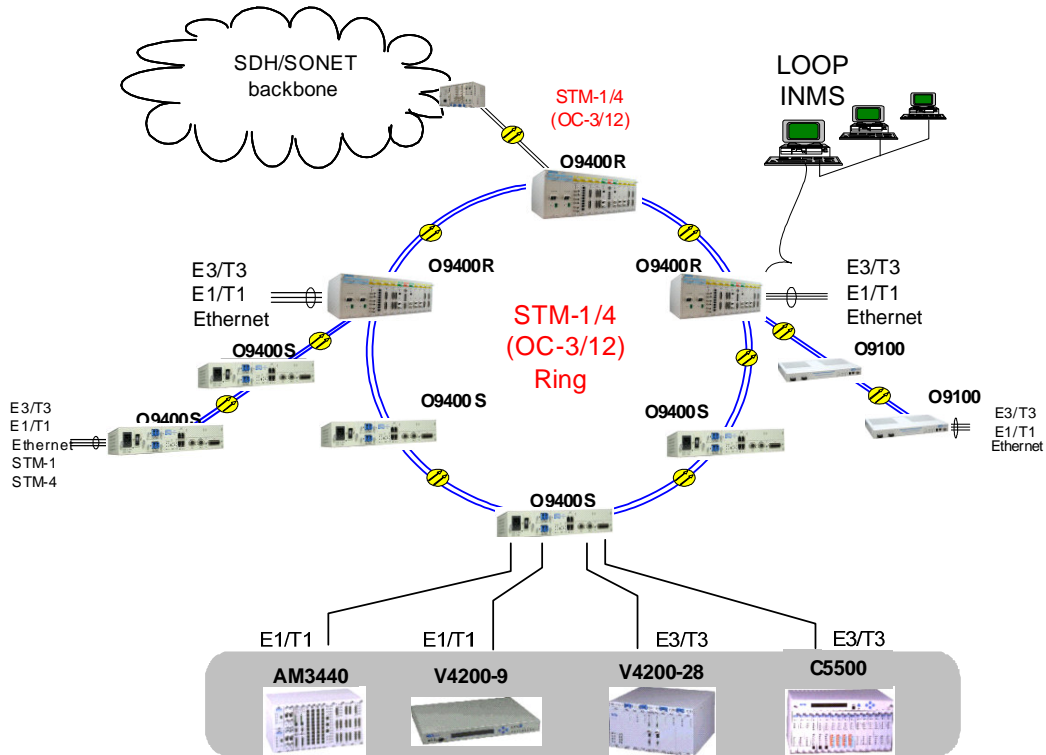

## Loop-O9400S Tributary Type and Capacity Reference Table

### 1US4

Slot Max. Capacity	Tributary Group1 (TG1)	Tributary Group2 (TG2)	Tributary Group3 (TG3)
48E1/T1	16 E1/T1	16 E1/T1	16 E1/T1
6E3/T3	N/A	3E3/T3	3E3/T3
2 GbE	N/A	1 GbE	1 GbE
8FE	N/A	4FE	4FE
1 GbE and 3 FE	N/A	N/A	1 GbE and 3 FE

Note: The maximum capacity of the tributary cards is one STM4.

### 1US1

Slot Max. Capacity	Tributary Group1 (TG1)	Tributary Group2 (TG2)	Tributary Group3 (TG3)
48E1/T1	16 E1/T1	16 E1/T1	16 E1/T1
2Gbe	N/A	1Gbe	1Gbe
8FE	N/A	4FE	4FE

Note: The maximum capacity of tributary cards is two STM1.

## Loop-O9400S Aggregate Line and Capacity Reference Table

### 1US4


SLOT Max. Capacity	Wa/Eb	Ea
2 STM-1/4 (OC-3/12) for ADM	STM-1/4 (OC-3/12)	STM-1/4 (OC-3/12)
2 STM-1/4 (OC-3/12) for TM (1+1)	STM-1/4 (OC-3/12)	STM-1/4 (OC-3/12)
2 STM-1/4 (OC-3/12) for 2 TM	STM-1/4 (OC-3/12)	STM-1/4 (OC-3/12)

### 1US1


SLOT Max. Capacity	Wa/Eb	Ea
2 STM-1 (OC-3) for ADM	STM-1 (OC-3)	STM-1 (OC-3)
2 STM-1 (OC-3) for TM (1+1)	STM-1 (OC-3)	STM-1 (OC-3)
2 STM-1 (OC-3) for 2 TM	STM-1 (OC-3)	STM-1 (OC-3)

## Block Diagrams:

### 1US4 Model

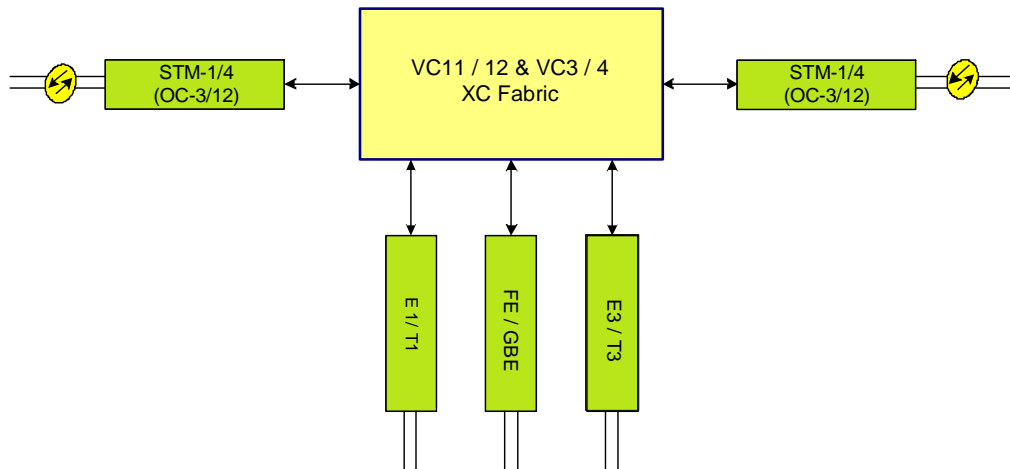

### 1US1 Model

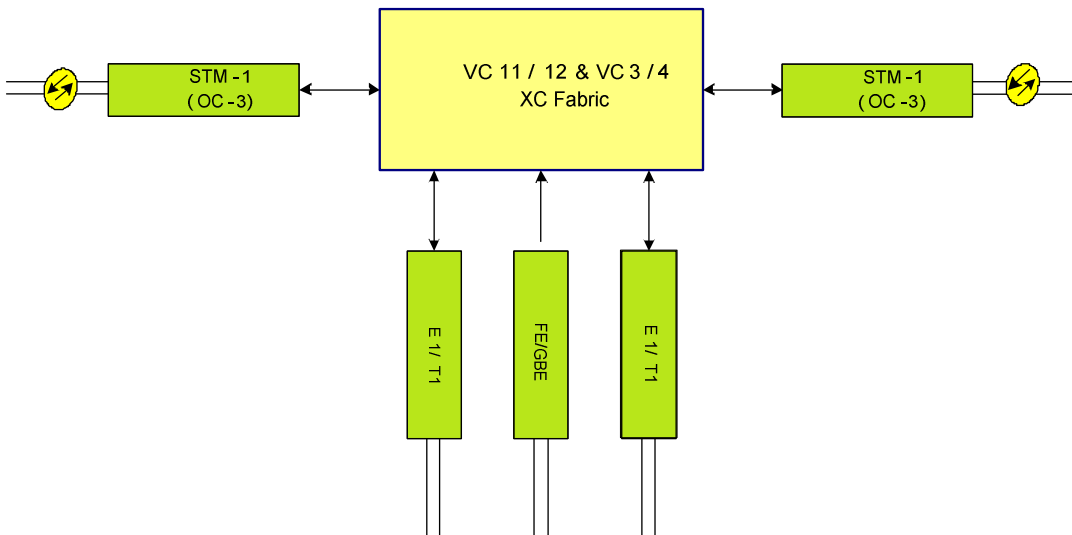

**LOOP TELECOMMUNICATION INTERNATIONAL, INC.**  
**ISO 9001/ISO 14001**

#### **Worldwide**

8F, No. 8, Hsin Ann Road,  
 Science-Based Industrial Park  
 Hsinchu, Taiwan 30078  
 Tel: +886-3-578-7696  
 Fax: +886-3-564-6272  
 www.LoopTelecom.com

#### **Taipei, Taiwan**

6F, No. 36, Alley 38, Lane 358,  
 Rueiguang Road,  
 Neihu, Taiwan 11492  
 Tel: +886-2-2659-0399  
 Fax: +886-2-2659-2325  
 michael\_tzeng@loop.com.tw

#### **North America**

8 Carrick Road  
 Palm Beach Gardens  
 Florida 33418, U.S.A.  
 Tel: +1-561-627-7947  
 Fax: +1-561-627-6615  
 jimber561@aol.com

#### **Tianjin China**

No. 240 Baidi Road  
 Nankai District  
 Tianjin 300192 China  
 Tel: +86-22-8789-4027  
 Fax: +86-22-8789-0344  
 wym@loop-tj.com

sales@loop.com.tw

© 2010 Loop Telecommunication International, Inc.  
 Version 19 06 JAN 2010

All Rights Reserved  
 Subject to change without notice