

SHDSL.bis

Up to 60 Mbps

E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG

FlexDSL Orion3 DIMEX bis+

TDM Based SHDSL.bis



Features

- SHDSL and SHDSL.bis (TC-PAM16/32/64/128)
- Up to 15.2Mbps over single and up to 60.8Mbps over quadruple pair copper
- E1 (G.703/704) and Nx64 (V.35/36, X.21)
- Daughterboard's: RS-232/485/422, In-/Output, Real Time Clock, Memory for Log, Bluetooth
- Layer 2 managed Ethernet Switch with VLAN support (10/100BaseT)
- Multi-Service Operation
- Point-to-Point, Point-to-Multipoint and Ring
- Console Port, Telnet, Web, SNMP Management
- 48VDC Powered
- Remote Power Support 120/200VDC
- Repeater/Regenerator Support
- Extended temperature range option

The FlexDSL **Orion3 SHDSL.bis Extended** product family offers a broad range of products, which are based on the latest SHDSL.bis standards (ITU-T G.991.2 & ETS TS 101 524), while also being fully interoperable with all our existing SHDSL equipment (Orion1 & Orion2). The FlexDSL Orion3 supports TC-PAM8/16/32 and the new TC-PAM64/128 line coding. The support of these line codes ensures compatibility with existing SHDSL equipment, that is already installed, in order to protect customer investments, while at the same time providing an upgrade path to the newest DSL technologies.

SHDSL.bis Extended allows symmetrical data and voice transmission at speeds up to 15.2Mbps over a single pair of copper. In addition, the FlexDSL Orion3 modem range also supports DSL channel bonding for up to 4 copper pairs in order to achieve speeds to 60.8Mbps! This incredible speed makes Fiber installations in a lot of places needless. FlexDSL Orion3 SHDSL.bis Extended modems can provide up to 4 complete E1 interfaces, which support framed and unframed services (G.703/G.704). An integrated 2 or 4 port Ethernet layer 2 managed switch with VLAN support (10/100BaseT) ensures connectivity to IP services. Beside of E1 and Ethernet we have additional interfaces like Nx64 that can be configured to be a V.35, V.36, X.21 or V.24 (RS-232) interface by software. This makes FlexDSL Orion3 SHDSL.bis Extended modems a perfect solution for a wide range of applications in which TDM and IP services need to be transmitted over copper wires.

Like all FlexDSL Orion products, the Orion3 SHDSL.bis Extended modems family is based on industrial components and is manufactured according to highest quality standards providing additional value due to the extended temperature range and higher reliability. The combination of comprehensive functions providing maximum flexibility together with the higher quality of the FlexDSL Orion3 SHDSL.bis Extended product family make it the perfect choice for all your DSL needs.


Specifications are subject to change without notice

SHDSL.bis
Up to 60 Mbps
E1 / Ethernet / Nx64


DAVANTEL

FlexDSL[®]
Telecommunications AG


FlexDSL Orion3 SHDSL.bis Extended Applications

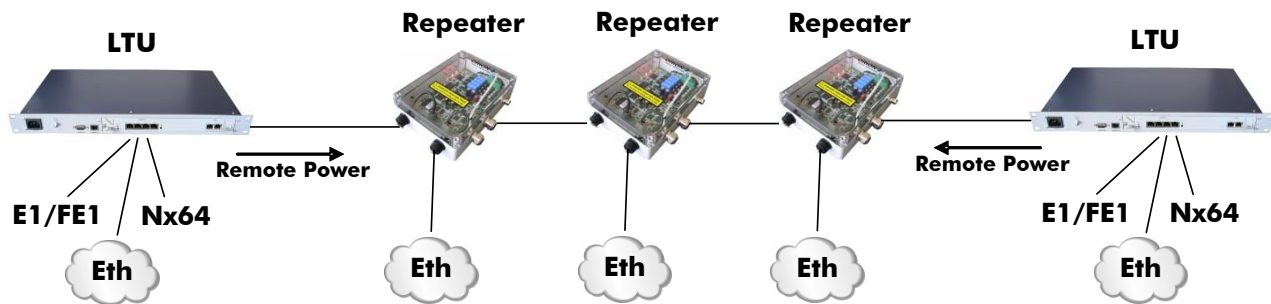

Ethernet Add/Drop Repeater Application with Remote Power

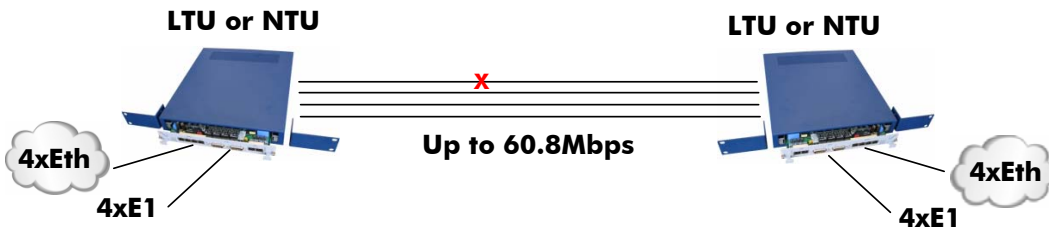

Point-to-Point Bonding Application with Failure Protection

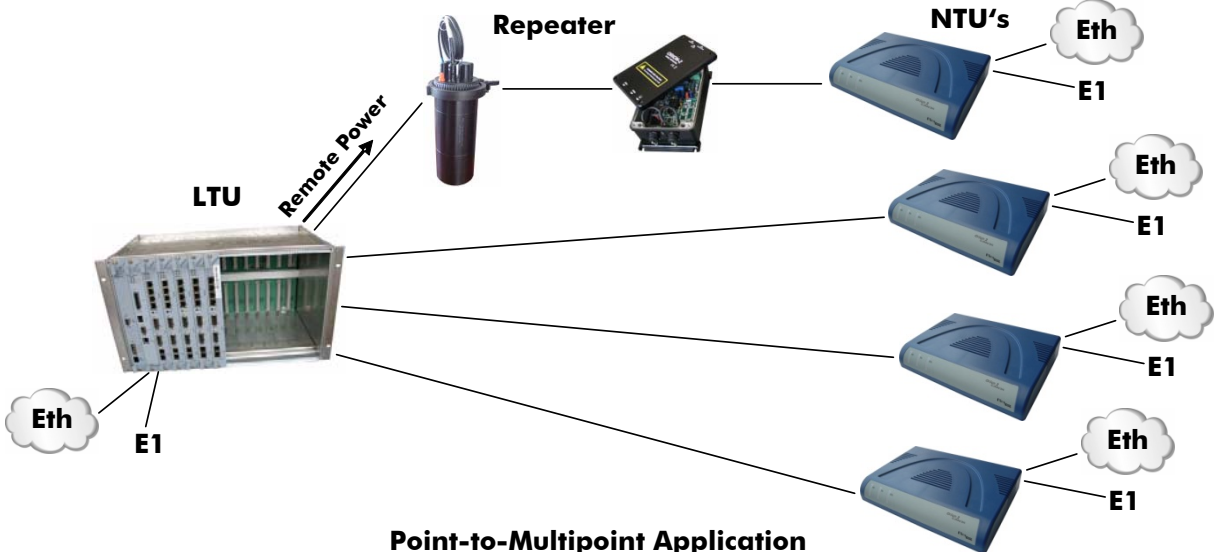

Point-to-Multipoint Application

Specifications are subject to change without notice


SHDSL.bis

Up to 60 Mbps


E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG

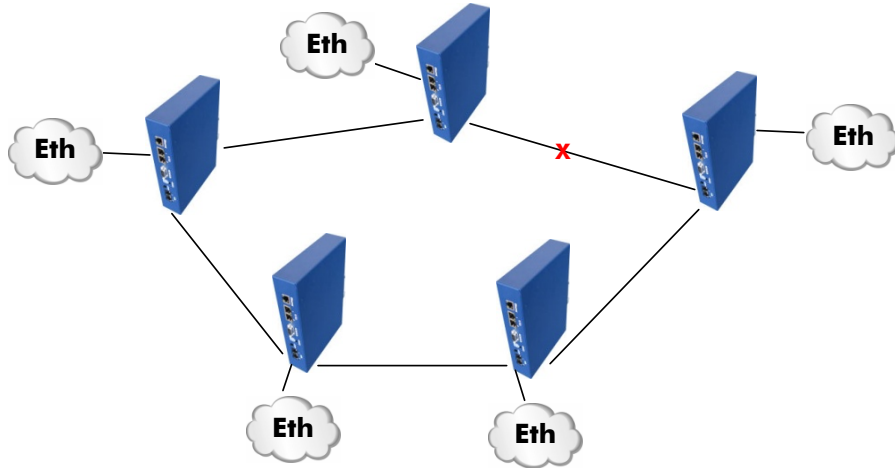

Ring Application

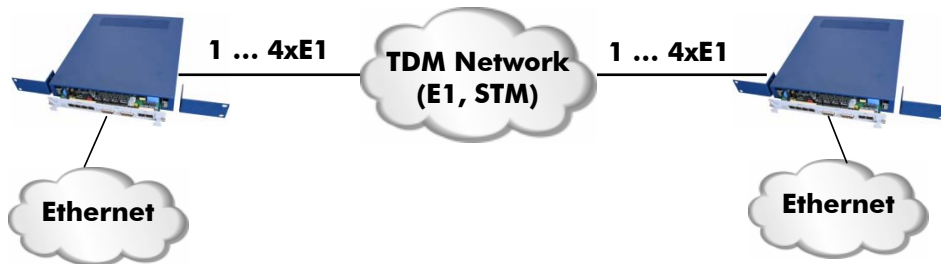

Ethernet to E1 Converter

Specifications are subject to change without notice

Desarrollos AVANZADOS en TELEcomunicaciones, S.L.
C/ Pardo, 6-8 bajos
08027 Barcelona
SPAIN

Tel: +34 933408712
Fax: +34 933401399
info@davantel.com
www.davantel.com

SHDSL.bis

Up to 60 Mbps

E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG

Orion3 SHDSL Standalone Modem



Model: FG-PAM-SAN-2E1B/2Eth,V80

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
Copper Pairs: 1
Modes: Master / Slave / Auto
Interface: 2x E1 (75/120Ohm), 2x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power, 2.8W Typ.
Physical Interfaces: RJ48 (E1), RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Model: FG-PAM-SA2N-2E1B/2Eth,V81

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 2
Modes: Master / Slave / Auto / Multipoint / Multipair
Interface: 2x E1 (75/120Ohm), 2x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power, 3.6W Typ.
Physical Interfaces: RJ48 (E1), RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Model: FG-PAM-SAN-2Eth,V82

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
Copper Pairs: 1
Modes: Master / Slave / Auto
Interface: 2x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power, 2.3W Typ.
Physical Interfaces: RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Model: FG-PAM-SA2N-2Eth,V83

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 2
Modes: Master / Slave / Auto / Multipoint / Multipair
Interface: 2x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power, 3.1W Typ.
Physical Interfaces: RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Specifications are subject to change without notice

SHDSL.bis

Up to 60 Mbps

E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG



Model: FG-PAM-SA4N-4Eth,V84

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 60.928Mbps, 4x 15.232Mbps
Copper Pairs: 4
Modes: Master / Slave / Auto / Multipoint / Multipair
Interface: 4x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power, 4.5W Typ.
Physical Interfaces: RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Model: FG-PAM-SAN-N64/2E1B,V85

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
Copper Pairs: 1
Modes: Master / Slave / Auto
Interface: 2x E1 (75/120Ohm), 1x Nx64 (V.35,V.36,X.21)
Power: 36 to 230VDC, accepts local and remote power, 2.8W Typ.
Physical Interfaces: RJ48 (E1), DB26 (Nx64), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Model: FG-PAM-SA2N-N64/2E1B,V86

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 2
Modes: Master / Slave / Auto / Multipoint / Multipair
Interface: 2x E1 (75/120Ohm), 1x Nx64 (V.35,V.36,X.21)
Power: 36 to 230VDC, accepts local and remote power, 3.6W Typ.
Physical Interfaces: RJ48 (E1), DB26 (Nx64), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Model: FG-PAM-SAN-N64/2Eth,V87

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
Copper Pairs: 1
Modes: Master / Slave / Auto
Interface: 1x Nx64 (V.35,V.36,X.21), 2x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power, 2.8W Typ.
Physical Interfaces: DB26 (Nx64), RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Model: FG-PAM-SA2N-N64/2Eth,V88

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 2
Modes: Master / Slave / Auto / Multipoint / Multipair
Interface: 1x Nx64 (V.35,V.36,X.21), 2x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power, 3.6W Typ.
Physical Interfaces: DB26 (Nx64), RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Specifications are subject to change without notice

SHDSL.bis

Up to 60 Mbps

E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG



Orion3 SHDSL DIN Rail Modem

Model: FG-PAM-RAIL2N-2E1B/2Eth, V81

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 30.464Mbps, 2x 15.232Mbps

Copper Pairs: 2

Modes: Master / Slave / Auto / Multipoint / Multipair

Interface: 2x E1 (75/120Ohm), 2x Ethernet 10/100BaseT (Layer 2 Managed Switch)

Power: 36 to 230VDC, accepts local and remote power, 3.6W Typ.

Physical Interfaces: RJ48 (E1), RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)

Management: Console Port, Telnet, HTTP and SNMP

Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)

Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Model: FG-PAM-RAIL2N-2Eth, V83

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 60.928Mbps, 4x 15.232Mbps

Copper Pairs: 2

Modes: Master / Slave / Auto / Multipoint / Multipair

Interface: 2x Ethernet 10/100BaseT (Layer 2 Managed Switch)

Power: 36 to 230VDC, accepts local and remote power, 3.1W Typ.

Physical Interfaces: RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)

Management: Console Port, Telnet, HTTP and SNMP

Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)

Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Model: FG-PAM-RAIL4N-4Eth, V84

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 60.928Mbps, 4x 15.232Mbps

Copper Pairs: 4

Modes: Master / Slave / Auto / Multipoint / Multipair

Interface: 4x Ethernet 10/100BaseT (Layer 2 Managed Switch)

Power: 36 to 230VDC, accepts local and remote power, 4.5W Typ.

Physical Interfaces: RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)

Management: Console Port, Telnet, HTTP and SNMP

Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)

Temperature Range: Standard: -5 to +45°C, Extended: -20 to +80°C

Specifications are subject to change without notice

SHDSL.bis

Up to 60 Mbps

E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG



Orion3 SHDSL Sub Rack Module

Model: FG-PAM-SRL-2E1B/4Eth-RP,V90

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 15.232Mbps

Copper Pairs: 1

Modes: Master / Slave / Auto

Interface: 2x E1 (75/120Ohm), 4x Ethernet 10/100BaseT (Layer 2 Managed Switch)

Power: 36 to 72VDC local power, 120/200VDC remote power source

Physical Interfaces: DB15 (E1), RJ45 (Ethernet), RJ48 (SHDSL), DIN41612 (Backplane)

Management: Telnet, HTTP, SNMP, Console Port via ACU/TCU

Model: FG-PAM-SRL-2E1B/N64/4Eth-RP,V91

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 15.232Mbps

Copper Pairs: 1

Modes: Master / Slave / Auto

Interface: 2x E1 (75/120Ohm), 1x Nx64 (V.35,V.36,X.21), 4x Ethernet 10/100BaseT (Layer

Power: 36 to 72VDC local power, 120/200VDC remote power source

Physical Interfaces: DB15 (E1), DB26 (Nx64), RJ45 (Ethernet), RJ48 (SHDSL), DIN41612 (Backplane)

Management: Telnet, HTTP, SNMP, Console Port via ACU/TCU

Model: FG-PAM-SR2L-4E1B/4Eth-RP,V93

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 30.464Mbps, 2x 15.232Mbps

Copper Pairs: 2

Modes: Master / Slave / Auto / Multipoint / Multipair

Interface: 4x E1 (75/120Ohm), 4x Ethernet 10/100BaseT (Layer 2 Managed Switch)

Power: 36 to 72VDC local power, 120/200VDC remote power source

Physical Interfaces: DB15 (E1), RJ45 (Ethernet), RJ48 (SHDSL), DIN41612 (Backplane)

Management: Telnet, HTTP, SNMP, Console Port via ACU/TCU

Model: FG-PAM-SR2L-2E1B/N64/4Eth-RP,V94

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 30.464Mbps, 2x 15.232Mbps

Copper Pairs: 2

Modes: Master / Slave / Auto / Multipoint / Multipair

Interface: 2x E1 (75/120Ohm), 1x Nx64 (V.35,V.36,X.21), 4x Ethernet 10/100BaseT (Layer

Power: 36 to 72VDC local power, 120/200VDC remote power source

Physical Interfaces: DB15 (E1), DB26 (Nx64), RJ45 (Ethernet), RJ48 (SHDSL), DIN41612 (Backplane)

Management: Telnet, HTTP, SNMP, Console Port via ACU/TCU

Model: FG-PAM-SR4L-4E1B/4Eth-RP,V96

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 60.928Mbps, 4x 15.232Mbps

Copper Pairs: 4

Modes: Master / Slave / Auto / Multipoint / Multipair

Interface: 4x E1 (75/120Ohm), 4x Ethernet 10/100BaseT (Layer 2 Managed Switch)

Power: 36 to 72VDC local power, 120/200VDC remote power source

Physical Interfaces: DB15 (E1), RJ45 (Ethernet), RJ48 (SHDSL), DIN41612 (Backplane)

Management: Telnet, HTTP, SNMP, Console Port via ACU/TCU

Specifications are subject to change without notice

SHDSL.bis

Up to 60 Mbps

E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG



Model: FG-PAM-SR4L-4Eth,V98

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 60.928Mbps, 4x 15.232Mbps

Copper Pairs: 4

Modes: Master / Slave / Auto / Multipoint / Multipair

Interface: 4x Ethernet 10/100BaseT (Layer 2 Managed Switch)

Power: 36 to 72VDC local power

Physical Interfaces: RJ45 (Ethernet), RJ48 (SHDSL), DIN41612 (Backplane)

Management: Telnet, HTTP, SNMP, Console Port via ACU/TCU

Model: FG-PAM-SR2L-4E1B/4Eth-350,V11

DSL Version: SHDSL / SHDSL.bis / Extended

Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128

Data Rate: 128kbps - 30.464Mbps, 2x 15.232Mbps

Copper Pairs: 2

Modes: Master / Slave / Auto / Multipoint / Multipair

Interface: 4x E1 (75/120Ohm), 4x Ethernet 10/100BaseT (Layer 2 Managed Switch)

Power: 36 to 72VDC local power, 200/350VDC remote power source

Physical Interfaces: DB15 (E1), RJ45 (Ethernet), Screwing Terminal (SHDSL), DIN41612 (Backplane)

Management: Telnet, HTTP, SNMP, Console Port via ACU/TCU

Specifications are subject to change without notice

SHDSL.bis

Up to 60 Mbps

E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG

Orion3 SHDSL Repeater

Model: FG-PAM-RGN-Eth-PL, V83
FG-PAM-RG2N-Eth-PL, V84



DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 1 (FG-PAM-RGN-Eth-PL, V83)
2 (FG-PAM-RG2N-Eth-PL, V84)
Modes: Master / Slave / Auto
Interface: 2/4x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power
Physical Interfaces: RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Powering by external Remote Power Module FG-SR2-RP
Temperature Range: -25 to +80°C

Model: FG-PAM-RGN-2Eth-RL, V81
FG-PAM-RG2N-4Eth-RL, V84



DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 1 (FG-PAM-RGN-2Eth-RL, V81)
2 (FG-PAM-RG2N-4Eth-RL, V84)
Modes: Master / Slave / Auto
Interface: 2/4x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power
Physical Interfaces: RJ45 (Ethernet), RJ48 (SHDSL), Molex (Power), DB9 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Powering by external Remote Power Module FG-SR2-RP
Temperature Range: -25 to +80°C

Model: FG-PAM-RGN-Eth-IPP, V83R
FG-PAM-RG2N-Eth-IPP, V84R



DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 1 (FG-PAM-RGN-Eth-IPP, V83R)
2 (FG-PAM-RG2N-Eth-IPP, V84R)
Modes: Master / Slave / Auto
Interface: 1x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power
Physical Interfaces: RJ45 (Ethernet), Screwing Terminal (SHDSL, Power), RJ45 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Powering by external Remote Power Module FG-SR2-RP
Temperature Range: -25 to +80°C

Specifications are subject to change without notice

SHDSL.bis

Up to 60 Mbps

E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG



Model: FG-PAM-RGN-Eth-IPL, V83R
FG-PAM-RG2N-Eth-IPL, V84R

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 1 (FG-PAM-RGN-Eth-IPL, V83R)
2 (FG-PAM-RG2N-Eth-IPL, V84R)
Modes: Master / Slave / Auto
Interface: 1x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power
Physical Interfaces: RJ45 (Ethernet), Screwing Terminal (SHDSL, Power), RJ45 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Powering by external Remote Power Module FG-SR2-RP
Temperature Range: -25 to +80°C



Model: FG-PAM-RGN-Eth-IPH, V83R
FG-PAM-RG2N-Eth-IPH, V84R

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 1 (FG-PAM-RGN-Eth-IPH, V83R)
2 (FG-PAM-RG2N-Eth-IPH, V84R)
Modes: Master / Slave / Auto
Interface: 1x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power
Physical Interfaces: RJ45 (Ethernet), Screwing Terminal (SHDSL, Power), RJ45 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Powering by external Remote Power Module FG-SR2-RP
Temperature Range: -25 to +80°C



Model: FG-PAM-RGN-Eth-IPS, V83R
FG-PAM-RG2N-Eth-IPS, V84R

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 15.232Mbps
128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 1 (FG-PAM-RGN-Eth-IPS, V83R)
2 (FG-PAM-RG2N-Eth-IPS, V84R)
Modes: Master / Slave / Auto
Interface: 1x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 230VDC, accepts local and remote power
Physical Interfaces: RJ45 (Ethernet), Screwing Terminal (SHDSL, Power), RJ45 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Powering by external Remote Power Module FG-SR2-RP
Temperature Range: -25 to +80°C

Model: FG-PAM-RG2N-350,V10

DSL Version: SHDSL / SHDSL.bis / Extended
Modulation: TC-PAM4 / TC-PAM8 / TC-PAM16 / TC-PAM32 / TC-PAM64 / TC-PAM128
Data Rate: 128kbps - 30.464Mbps, 2x 15.232Mbps
Copper Pairs: 2
Modes: Master / Slave / Auto
Interface: 1x Ethernet 10/100BaseT (Layer 2 Managed Switch)
Power: 36 to 350VDC, accepts local and remote power
Physical Interfaces: RJ45 (Ethernet), Screwing Terminal (SHDSL, Power), RJ45 (Management)
Management: Console Port, Telnet, HTTP and SNMP
Power Supply: 90-260VAC option with FG-PAM-PA48G (not included)
Powering by external Remote Power Module FG-SR2-RP
Temperature Range: -25 to +80°C

Specifications are subject to change without notice

SHDSL.bis

Up to 60 Mbps

E1 / Ethernet / Nx64

DAVANTEL

FlexDSL[®]
Telecommunications AG



Orion3 Daughterboard's

Model: FG-PAM-Nx64

Interface: V.35, V.36, X.21
Physical Interfaces: DB26
Data Rate: 64kbps - 8.192Mbps

Model: FG-PAM-RS232

Interface: RS-232, V.24/28
Physical Interfaces: DB26
Data Rate: 1200-256000 Baud

Model: FG-PAM-RS485/422

Interface: RS-485/422
Physical Interfaces: DB26
Data Rate: 1200-256000 Baud

Model: FG-PAM-8IN4OUT

Interface: 8 isolated Inputs, 4 isolated Outputs
Physical Interfaces: DB26

Model: FG-PAM-RTC

Interface: Real Time Clock and Memory for Log Files

Model: FG-PAM-BLUETOOTH

Interface: Bluetooth

Specifications are subject to change without notice