


# QuOmni 5G/LTE Global MIMO 4x4

## Omnidirectional ultra wideband 5G/LTE MIMO 4x4 antenna

QuOmni 5G/LTE omnidirectional MIMO 4x4 is ultra wideband LTE Outdoor antenna. It's primary designed for LTE/5G/3G/2G devices which require high efficiency connections. The antenna covers many LTE bands including the new Extended LTE Band 71, frequencies: **617 - 6000MHz**. The mounting bracket allows the antenna to be installed on the buildings (on the pole or on the wall) as the client antenna or on the moving points like trains, buses, lorries, yachts, boats to receive Internet by LTE/5G/3G/2G. It's ideal solution to use with all industrial and domestic 4x4 LTE modems and routers like: Teltonika, DIGI, Mikrotik, Robustel, Cisco, etc.

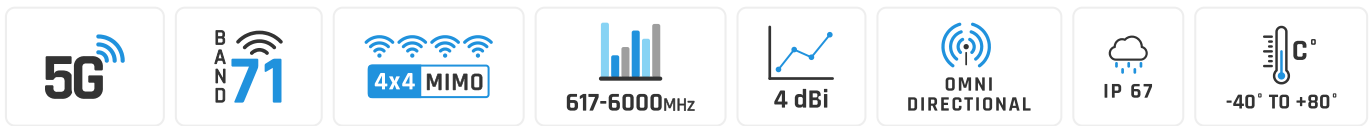

WIDE BAND 600-6000MHZ, 5G TECHNOLOGY



GALVANIZED STEEL, WALL OR POLE MOUNTING BRACKET



FOUR SMA CONNECTORS



360° BEAMWIDTH



4.5DBI GAIN



MADE IN EUROPE



## 5G / LTE ANTENNA SPECIFICATION


<b>FREQUENCY</b>	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
<b>GAIN</b>	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 GHz : 2.5dBi
<b>SUPPORTED LTE BANDS</b>	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
<b>SUPPORTED 5G BANDS</b>	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
<b>VSWR</b>	<1.80, max <2.00
<b>BEAMWIDTH</b>	360°/35° ±5°
<b>POLARIZATION</b>	Vertical
<b>IMPEDANCE</b>	50 Ω

## MECHANICAL SPECIFICATION

<b>MATERIALS</b>	ABS, aluminum, PTFE
<b>CONNECTOR TYPE</b>	SMA
<b>INGRESS PROTECTION</b>	IP67
<b>DIMENSIONS</b>	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
<b>WEIGHT</b>	1.5 kg 3.31 lbs
<b>OPERATING TEMPERATURE</b>	From -40°C to 80°C From -40°F to 176°F

## FREQUENCY BANDS

<b>LTE / 4G</b>	1	2	3	4	5	7	8	6000 MHZ
	9	10	12	13	14	17	18	
	19	20	22	25	26	27	28	
	29	30	33	34	35	36	37	
	38	39	40	41	42	43	44	
	47	48	49	52	53	65	66	
	67	68	69	71	85	103	106	
	617 MHZ							



	n1	n2	n3	n5	n7	n8	n12	
	n13	n14	n18	n20	n25	n26	n28	
	n29	n30	n34	n38	n39	n40	n41	
617 MHz	n47	n48	n53	n65	n66	n67	n71	6000 MHz
	n77	n78	n80	n81	n82	n83	n84	
	n85	n86	n89	n90	n95	n97	n98	
	n100	n101	n256					


## COMPATIBLE ROUTERS

VARIANTS: A05G4-G, A05G4-G1


<b>TELTONIKA</b>	RUTX12, RUTX14, RUTX50, TRB500
<b>DIGI</b>	TX54 LTE-Advanced
<b>ROBUSTEL</b>	R2000
<b>SIEMENS</b>	6GK5853-2EA00-2DA1
<b>COMSET</b>	CM770W-6
<b>CRADLEPOINT</b>	IBR1700
<b>FORTINET</b>	FEX-311F
<b>OTHER</b>	4 * SMA
<b>PEPLINK</b>	BR1 Pro (CAT-20), MAX HD2, MAX HD2 Mini, MAX Transit, UBR Plus

# PLOTS



## VSWR

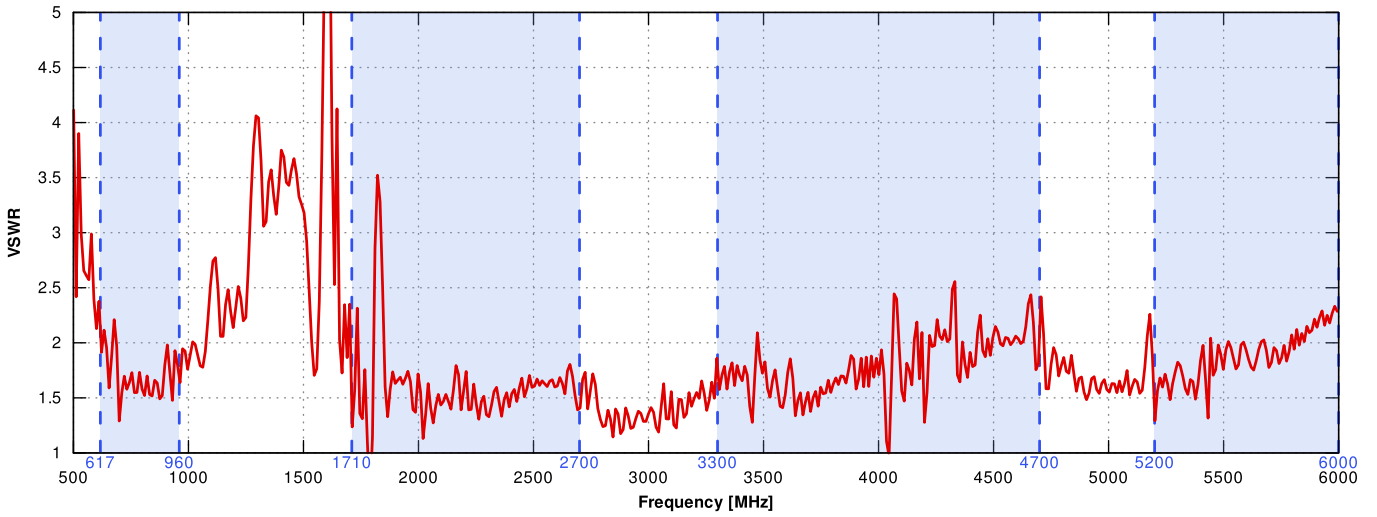



## Gain

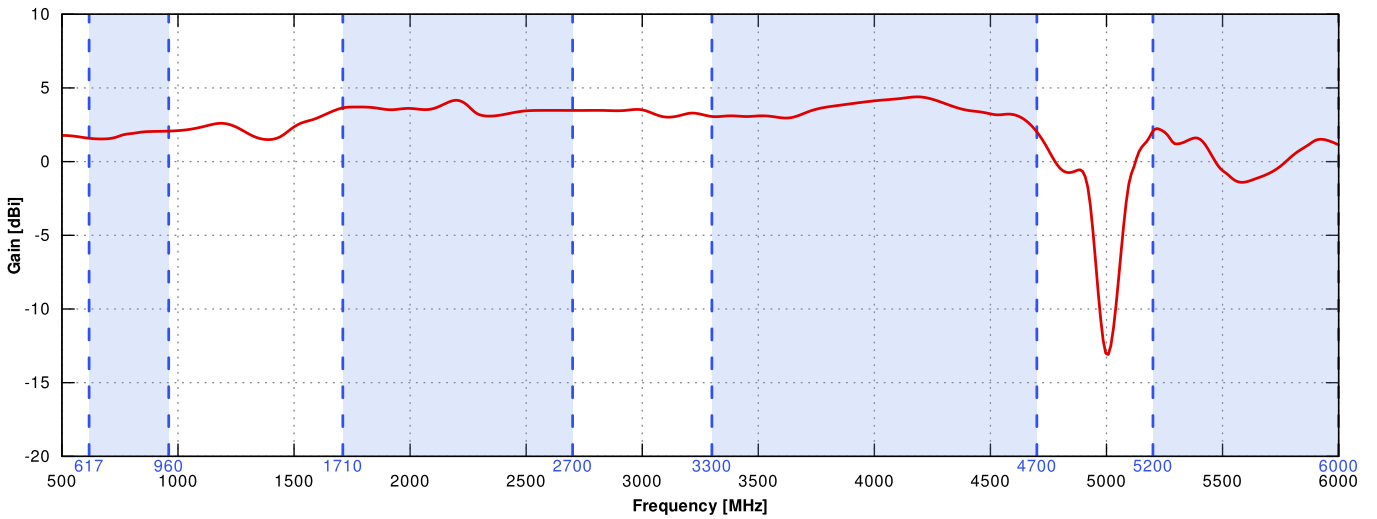



From 617MHz to 960MHz

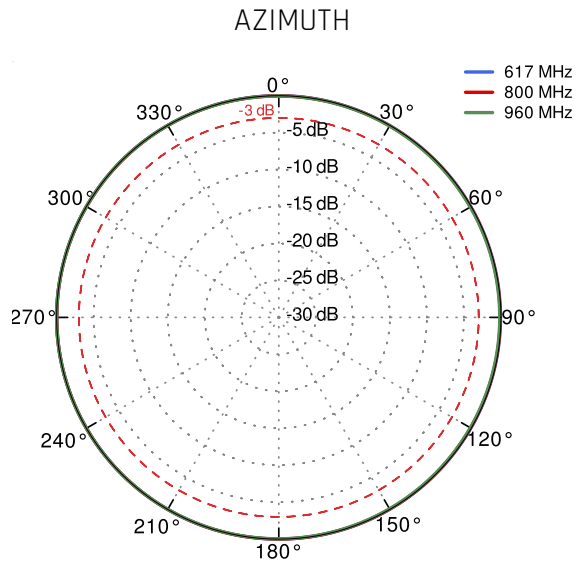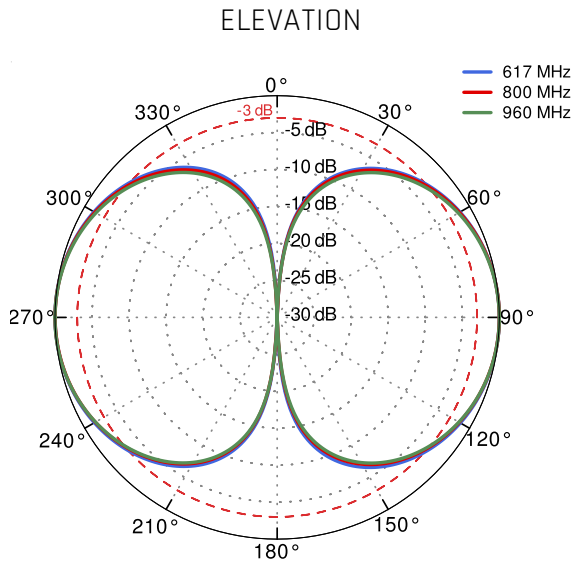



From 1.71GHz to 2.5GHz

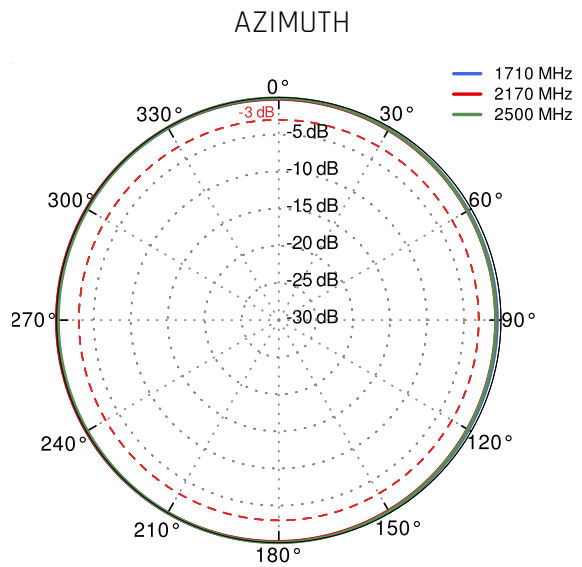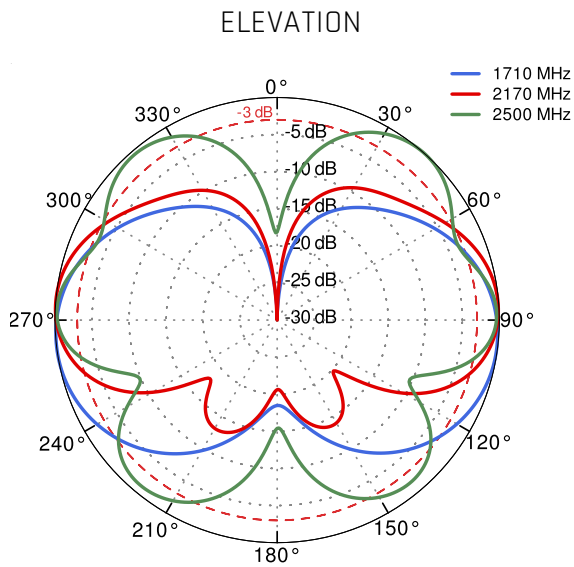

From 3.3GHz to 4.2GHz

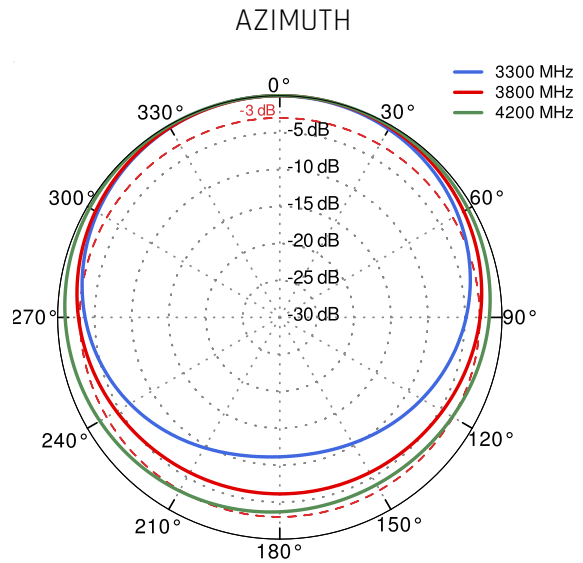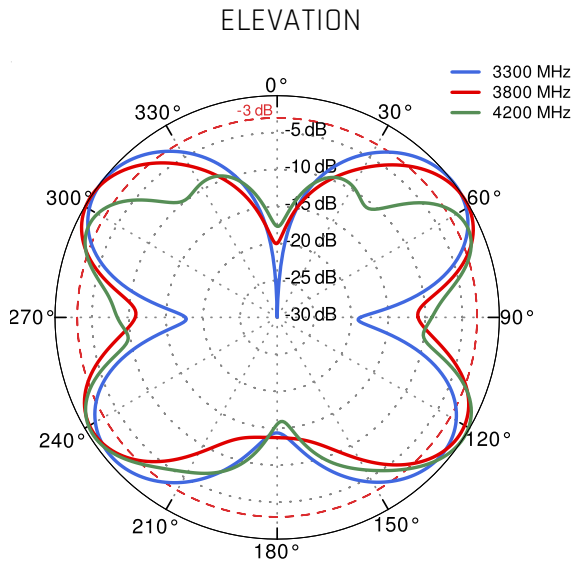

From 4.6GHz to 5.5GHz

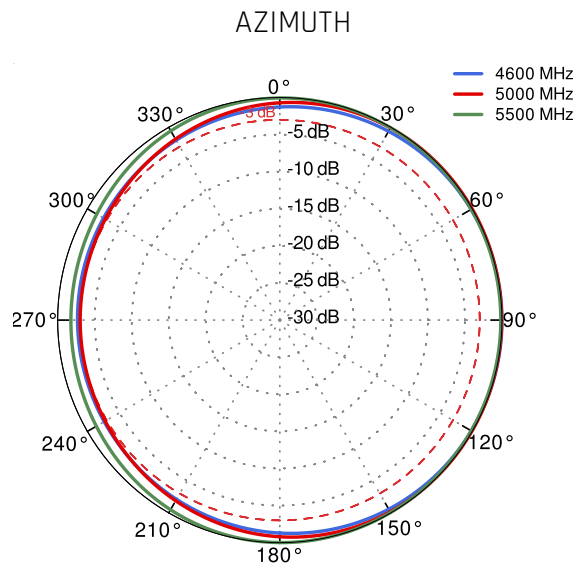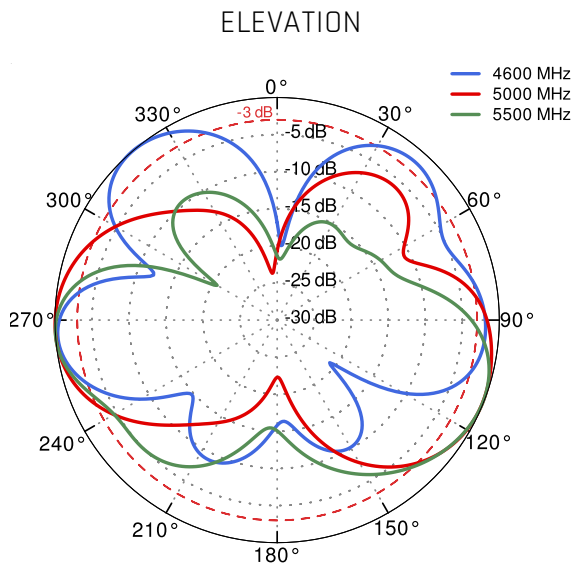

## **DIMENSIONS**

