

# Ethernet 10BASE-T to 10BASE2

Just Convert-IT™

## Stand-Alone Media Converters


J/E-CX-TBT-02

NEW



Convert 10BASE-T to 10BASE2

### ▶ Connect Legacy Equipment

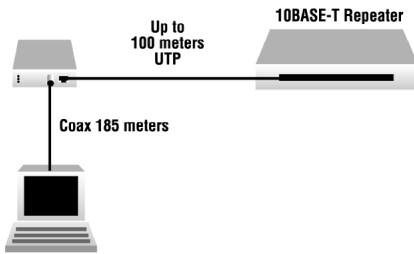

#### ▶ Connect Legacy Equipment

Connect an existing 10BASE2 segment or device to a twisted pair segment.

### Ordering Info

Product Number	Port One	Port Two
J/E-CX-TBT-02	10BASE-T (RJ-45) [100 m/328 ft.]	10BASE2 (BNC) [185 m / 607 ft.]

### Specifications

Standards	IEEE Std. 802.3™ 10BASE-T, 10BASE2
Switches	MDI/MDI-X: Selects correct RJ-45 port setting
Status LEDs	<b>PWR (Power):</b> ON = Connected to external power <b>BNC/ACT (BNC Activity):</b> Flashing = 10BASE2 data traffic <b>TP/ACT (TP Activity):</b> ON = 10BASE-T link connection; Flashing = 10BASE-T data traffic <b>COL (Collision):</b> Flashing = Collision present
Dimensions	Width: 2.75" [71 mm] Depth: 3.7" [94 mm] Height: 1.0" [25 mm]
Power	External AC/DC: 5V DC, 1.0 A
Environment	0 – 50°C, 5% – 90% humidity non-condensing, 0 – 10,000 ft. altitude
Shipping Weight	2 lbs. [0.90 kg]
Safety Compliance	Wall Mount Power Supply: UL approved and CSA certified
Regulatory Compliance	CISPR22/EN55022 Class A, FCC Class A, CE Mark
Warranty	Lifetime

### Features

- ▶ Supports up to 24 devices daisy chained on one coax segment per twisted pair segment.
- ▶ MDI/MDI-X switch allows converter to be connected to either a workstation/NIC or hub, switches and routers without changing the cable type.
- ▶ BNC T-connector included for daisy chain applications.

Note: not rack-mountable